


## DATA SHEET

COD. **SK9001I**

### SIMPLEKEY ADVANCED READER IKALL

Central stand-alone module + Mifare® reader to insert into Comelit housing

- Watertight PVC housing
- Capacity: 1500 badges per module
- Programming: Badges encoded using PC software and USB encoder
- Adjustable timer: 1 - 60 seconds, preset to 5 seconds
- LED indicator for operation and diagnostics
- Stores the previous 1000 events
- Option to have ?pass? transmitters and to manage primary and secondary doors
- 1 entrance and 1 exit alarm
- 12 - 24 V AC / DC power supply.

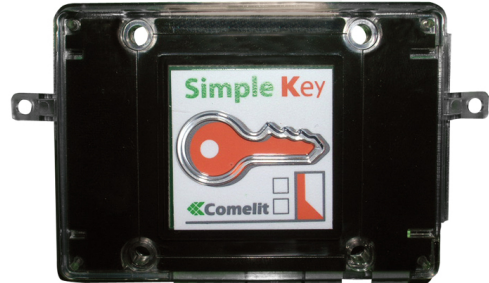

#### Compatibility

Access Control Family:	SI
------------------------	----

#### Connectivity

Alarm inputs/outputs:	1
USB 2.0 ports:	SI

#### General info

Intrastat code:	85171800
-----------------	----------

#### Packaging

Single pack height (mm):	77
Single pack width (mm):	75
Single pack weight (g):	3
Single pack depth (mm):	130
Single pack volume (dm3):	0,75