

JO SYSTEM

CAPACITY
1 DOOR > 2 MONITORS

THE "PLUS"

- 7" touch screen
- Complete and intuitive menu
- Call up to 8 smartphones
- Monitoring from the smartphone available
- Monitor with integrated WI-FI
- SD card picture memory (SD card not included)
- Compatible with existing JO installation



JO-1MDW
Master station
with integrated Wi-Fi



BOX SETS AVAILABLE :
SURFACE DOOR STATION : JOS-1VW
FLUSH DOOR STATION : JOS-1FW

FEATURES

- Expandable kits with 1 additional video monitor
- Vandal resistant surface or flush door station
- Hands-free communication
- iOS and Android compatible with "JO" application
- Up to 8 smartphones registered on the system
- Call notification by "push" on the application
- Monitoring available from the smartphone

SPECIFICATIONS

- Door release Dry closure contact load breaking capacity 0.5 A 18 VDC or 18 VAC
- Wiring 2-wire (+2 wire for door release) from door station to the master station

SERIES PRESENTATION



JO-1MDW
Master station
with integrated Wi-Fi



JO-DV
Vandal-resistant,
surface mount door
station



JO-DVF
Vandal-resistant,
flush mount door station



PS-1820DM
Power supply

WI-FI MONITOR

> Receive video calls from your door station on your smartphone



JO-1MDW
Master station
with Wi-Fi integrated

FEATURES

- **Call up to 8 smartphones**
- Audio and video communication
- Requires WIFI, 3G or 4G connection
- Email with picture notification if a call has been made during network failure
- Compatible with iOS and Android using the Aiphone JO app
- Monitoring available from smartphone
- Picture memory available from the smartphone
- Wi-Fi - WPS (WPS : **Wi-Fi Protected Setup**) Standard to simplify secure connexion of Wi-Fi equipment
- Simple setup by scanning the QR code

WIRING



MAIN FUNCTIONS

Smartphone screen when using JO application



Incoming call




Communication




Opening door

DIMENSIONS (mm)

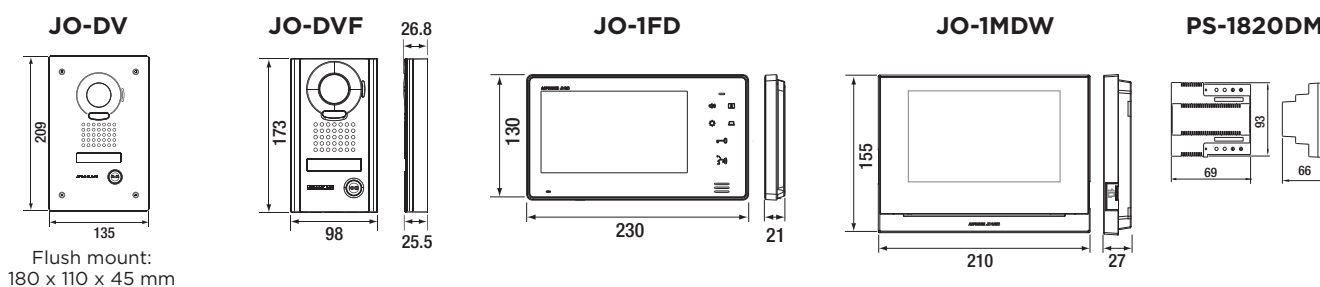

WIRING

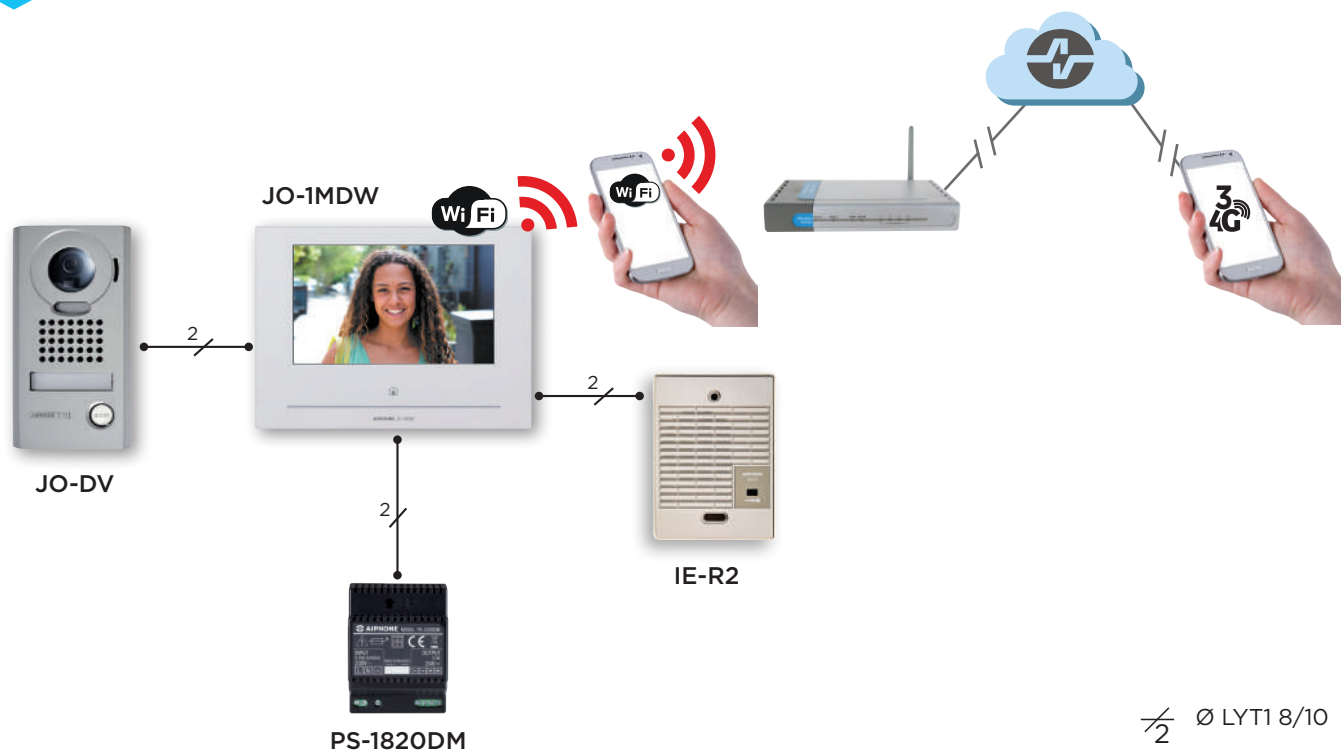

SUBSTATION WIRING

