

7100 Electric Strikes

Electric Strike for Double Leaf Aluminium Doors - 7101

The Adams Rite 7100 Series is for remote use access control of any door equipped with Adams Rite 4700 series (or similar) deadlatch.

The 7101 has a radiused faceplate for mounting in the rounded nose in the inactive leaf of paired doors.



Key Benefits

- Suitable for use on aluminium doors
- Non-handed
- The compact mechanism fits into an aluminium jamb section as shallow as 44.45mm
- Electrical actuation unlocks the strike jaw, releasing the latchbolt so the door can be opened without operating the latch itself
- 907kg holding force (2000lbs)
- The 7101 has a radiused faceplate for mounting in the rounded nose in the inactive leaf of paired doors.
- Round corners of faceplate to aid installation into aluminium doors
- Facility to change duty from fail-safe to fail-secure and vice-versa
- 3 year guarantee


Related Hardware

RiteKey Keypad ~ Push-to-Exit Button ~ Power Supply Unit ~4710 Deadlatch
~ 4750 Deadlatch

7100 Electric Strikes

Electric Strike for Double Leaf Aluminium Doors - 7101

Specification

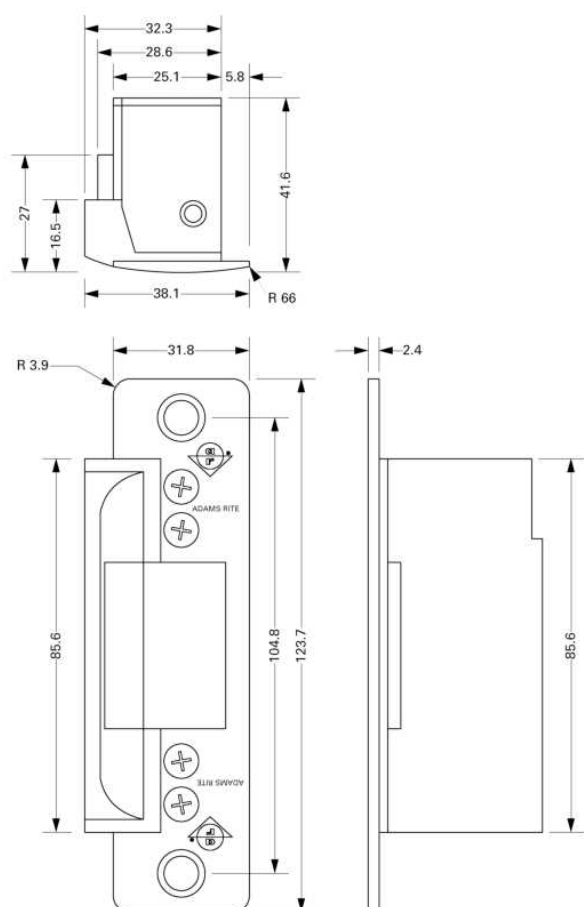

Current Draw:	12vAC=1.48A, 12vDC=0.332A, 24vAC=0.74A, 24vDC=0.19A (nominal). DC intermittent and continuous units are silent, AC intermittent units "buzz" on operation.
Voltage Tolerance:	+/- 10%
Powered by:	Internal solenoid
Duty:	Fail-safe or fail-secure (convertible without additional parts). DC power supply required for fail-safe operation.
Jaw Strength:	907kg (2000lbs).
Case:	85.6mm x 28.6mm x 41.6mm. Zinc aluminium alloy.
Mechanism:	Stainless steel internal blocking mechanism
Strike Opening:	36.5mm x 15.9mm x 12.7mm. Stainless steel bolt retainer jaw.
Door gap:	Minimum 3mm, operational gap 3-5mm
Faceplate:	Aluminium. 123.7mm x 31.8mm. Radiused
Finishes:	See ordering codes.
Subcover:	Subcover lip will suit a 44.45mm (1 3/4") thick door.
Standards:	ANSI/BHMA 156.5 Grade 1. UL Listed for burglary resistance.

Ordering Information

7101-310-628	7101 12VDC FAIL SECURE ELECTRIC RELEASE SAA
7101-315-628	7101 12VDC FAIL SAFE ELECTRIC RELEASE SAA
7101-340-628	7101 12VAC FAIL SECURE ELECTRIC RELEASE SAA
7101-515-628	7101 24VDC FAIL SAFE ELECTRIC RELEASE SAA

Accessories

31-0044-03	12VAC SOLENOID FAIL SECURE
31-0044-05	12VDC 24VAC SOLENOID FAIL SAFE/SEC
31-0044-07	24VDC SOLENOID FAIL SAFE/SECURE
91-0077-01-603	7100 ELECTRIC STRIKE FIXING PACK