

For use on UPVC doors

17 Series


Fail locked

37 Series

Fail unlocked

Features

- A universal strike standard with Fafix (FF) adjustment, see page 11
- 6mm striking plate for UPVC doors

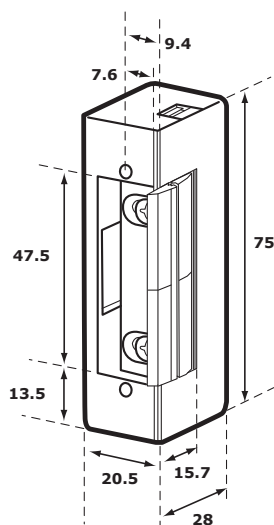

Rim mounted use

ISC


Rim housing
Rim inward
opening

ISCO

Rim housing
Rim outward
opening

The solution for installation situations where technical difficulties or legal regulations prevent flush mounting of electric strikes.

These are suitable for use with 14, 17, 34 and 37 Series strikes.

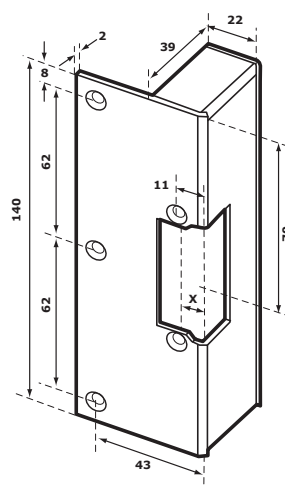

SECURITY RATING: NORMAL

17 SERIES FEATURES	FAIL LOCKED	FAIL UNLOCKED	MONITORING	8-16V AC/DC	12V DC	24V DC	HANDING
17----35440R14	•			•			L
17----35440R15	•			•			R
17----35440E44	•				•		L
17----35440E45	•				•		R
17RR---35440R14	•		•	•			L
17RR---35440R15	•		•	•			R
17RR---35440E44	•		•		•		L
17RR---35440E45	•		•		•		R

37 SERIES FEATURES	FAIL LOCKED	FAIL UNLOCKED	MONITORING	8-16V AC/DC	12V DC	24V DC	HANDING
37----35440E94		•			•		L
37----35440E95		•			•		R
37RR---35440E94	•	•			•		L
37RR---35440E95	•	•			•		R

For handing, on a door opening away from you right or left

17/37 TECHNICAL DATA

Standard break-in resistance 3,500N

Material
Standard housing Die-cast zinc
Keep Die-cast zinc
Surface-M attachment Fafix Brass

Operating temperature range -15° to +40°C

Handing Left or right, to be specified

Finish Zinc