


## DATA SHEET

COD. **6750W**

### MINI HANDSFREE ENTRY PHONE AND BM. A/V S2 SYSTEM

Mini series door-entry phone with full-duplex audio and integrated magnetic induction amplification system. Allows loudspeaker volume control and ringtone volume control, with choice of different melodies. Equipped with 5 touch sensitive buttons for audio key, lock-release, actuator control, switchboard call and privacy function, with door status indicator LED. Manages floor door calls as standard. Complete with 2 x 8-position dip-switches for programming user code and buttons. Wall-mounted. The door-entry phone can be used in SimplebusTop Color 2-wire systems with mixer art. 4888/C, Simplebus2 with power supply art. 1210 or kit that use the power supply art. 1209. Complete with distribution terminal art. 1214/2C. Dimensions: 4.13"x4.13"x0.79".

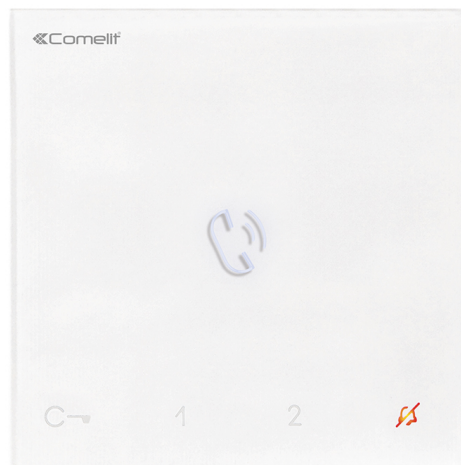

#### Main specifications

Wall-mounted:	Yes
Hands-free function:	Yes
Induction loop function:	Yes
Product colour:	White
Sensitive Touch technology:	Yes
Total buttons:	5
LED signaling (No.):	3

#### Functions

Actuator control function:	Yes
Switchboard call function:	Yes
Panic call:	Yes
Intercom function:	Yes
Selective intercom call:	Yes
Call to multiple addresses:	Yes
Privacy function:	Yes
Doctor:	Yes
Floor door call function:	Yes
Electronic bell:	Yes
Customisable ringtone:	Yes
Key button function:	Yes

#### Hardware specifications

Removable terminals:	Yes
Type of finish:	Plastic

#### Settings

Loudspeaker volume control:	Yes
-----------------------------	-----

The technical specifications are subject to variations without warning

# DATA SHEET

Ringtone volume control:	Yes
--------------------------	-----

## General data

Product height (inches):	4.13
Product width (inches):	4.13
Product depth (inches):	0.79

## Compatibility

Simplebus Top audio/video system:	Yes
Building Kit audio/video system:	Yes
Simplebus 2 audio system:	Yes
Kit audio/video system:	Yes

## Technical specifications

Power supply voltage:	22 ÷ 35
Absorption in standby (mA):	2
In communication absorption (mA):	130
IP Rating:	IP30
Operating temperature (°K):	268.15 ÷ 313.15
RH max operating humidity (%):	25 ÷ 75
Product weight (oz):	0.33
Clamps:	L L CFP1 CFP2