

Net2 Entry Premium Monitor

Latest Addition to Our Door Entry Range





Concierge Functionality



Call Administration



Premium Build Quality



Versatile Design



Net2 Entry Premium Monitor

The premium monitor is our new addition to the Net2 Entry door entry range. It comes with a capacitive glass touch screen and free concierge management, as well as 25 vivid background themes. Enjoy two-way video communication when used with the Net2 Entry Touch Panel. The premium monitor is compatible with our networked access control system Net2.





NET2 ENTRY PREMIUM MONITOR Watch the video here: paxton.info/3186



Personalise Your Experience

- Add your photo or organisation logo use with our touch panel and automatically update your image
- · Take your profile picture using the built in camera
- 25 vivid background themes available
- 2 screen savers available with an analogue or digital clock



Premium Build Quality

- Smart, slim design to match modern interiors
- Great sound quality that's clear as a bell
- Responsive capacitive glass touch screen
- Wall mount, desk stand and handset options



Concierge Management NEW



- Simple caller and site management at no extra cost
- Broadcast messages from the concierge to all monitors
- Save and remember commonly sent messages
- Divert to concierge when busy or away



Versatile Design

- Two-way video communication when used with the Net2 Entry Touch panel
- Simple integration with your door bell
- Line-out for use with T-Loop antenna for users with hearing aids
- High contrast theme available to ensure the screen is easy to read



Enhanced Call Administration

- · Call snapshot captures an image of missed visitors
- Event log for simple overview of visitors
- Do not disturb can be set to timed or scheduled



For more information visit paxton.info/3185

Elegant. Intelligent. Secure.



Net2 Entry - Premium monitor

System specifications

Power over Ethernet (PoE)

Yes - IEEE 802.3af class 0

Ethernet bandwidth requirement

1Mb/s multicast per panel during call

Monitors per system

≤1000

TCP/IP ethernet extension limit

100m/328ft

Cable type

CATE

Current consumption

3.2 W (Average) 4.5 W (Max)

Hardware features

riaraware reature

Full Duplex

Audio system Screen

Colour LED , capacitive

touch screen

Screen size

7″, 16:9

Screen resolution

800 x 480

Camera

Digital with IR filter

Door bell input

2 wire, 8v illumination

supported

LED status indicator

RGB LED

Back lighting colour

White

Software features

Selectable ringtones

Yes

Do Not Disturb function

Yes Yes

Call snapshot
Built in help menu

Yes

'View video' mode

Yes

Concierge mode

Yes

Environment

Operating Temperature

-0°C - +49°C +32°F - +120°F

No

Moisture resistance

INO

Vandal Resistance

Low Yes

Surface mount

Backbox compatibility

UK, Euro, USA

Accessories

Desktop stand


Optional


Net2 Entry is a door entry system that works standalone or alongside Paxton's Net2 access control, combining door entry with key features of Net2. Net2 Entry consists of 3 components that auto-detect on set up; external panel, interior monitor and door control unit. Net2 Entry is a plug and play solution that comes with a range of panel options and is suitable for a wide variety of sites.


The Net2 Entry Premium Monitor comes either with or without a handset, and can be wall or desk mounted. Net2 Entry components simply interconnect using Cat5 or standard RJ45 terminated patch cables. Net2 Entry can also utilise existing network infrastructure for simple installation. PoE technology runs power and data along the same cable to avoid the need for separate power supplies. A visitor initiates a video call via the bell button on the external panel. Visitor access can be granted via the Net2 Entry Premium Monitor, which features an intuitive capacitive touchscreen user interface.



DS1064

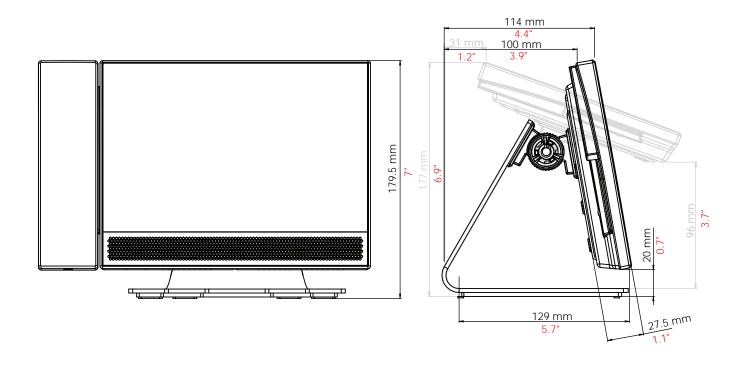

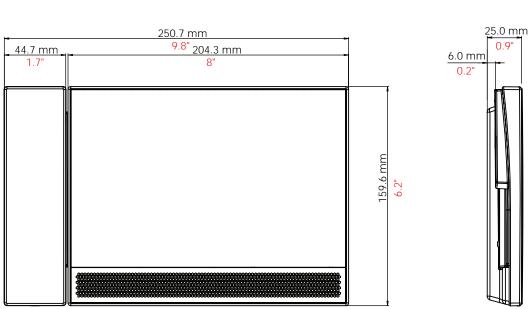



Net2 Entry Premium monitor - desktop stand	337-294
Accessories	
Net2 Entry Premium monitor - surface mount with handset	337-292
Net2 Entry Premium monitor -surface mount	337-290

